

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number
WO 02/063834 A1(51) International Patent Classification: H04L 12/46,
H04J 3/16Martlesham, Woodbridge, Suffolk IP12 4TT (GB).
MCGUIRE, Alan [GB/GB]; 6 Princes Gardens, Felix-
stowe, Suffolk IP5 2GT (GB).

(21) International Application Number: PCT/GB02/00361

(74) Agent: NASH, Roger, William; BT Group Legal Ser-
vices, Intellectual Property Department, Holborn Centre,
8th Floor, 120 Holborn, London EC1N 2TE (GB).

(22) International Filing Date: 28 January 2002 (28.01.2002)

(25) Filing Language: English


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
01300935.2 2 February 2001 (02.02.2001) GB(71) Applicant (for all designated States except US): BRITISH
TELECOMMUNICATIONS PUBLIC LIMITED
COMPANY [GB/GB]; 81 Newgate Street, London EC1A
7AJ (GB).(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR). OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).(72) Inventors; and
(73) Inventors/Applicants (for US only): FLAVIN, Anthony,
John [GB/GB]; 5 Clayton Court, Seckford Heights,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR TUNNELLING DATA IN A NETWORK

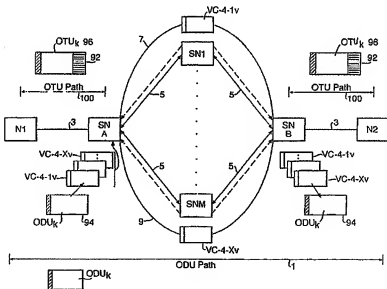

(57) Abstract: A communications network including nodes which permit networks to be tunnelled across intermediate networks. The present invention has application, in particular, to SDH networks, SONET and OTN. The content of entities for transportation across an existing network are mapped into a series of subframes and are virtually concatenated across the network. Each subframe is assigned a sequence indicator, which allows the original entity to be assembled at a remote node.

WO 02/063834 A1